

- ROAD CLOSURE**
- All traffic signs shall comply with Chapter 8 of the Traffic Signs Manual
  - All traffic management equipment shall be provided by the Contractor, unless otherwise specified.
  - All signs shall be positioned so as not to be obscured by any other objects and shall not obstruct any other sign, permanent or temporary as much as is reasonably practicable.
  - All traffic signs shall meet the reflectorisation requirements of BS 873 : Part 6 : 1983, Table 1.
  - Works Access/Egress to be positioned to suit ongoing works.

**BLUEARROW**  
TRAFFIC MANAGEMENT LTD

Signage to be agreed on site.

**LANTRA AWARDS**

**NHS**  
national highway sector schemes

**HA**  
Approved Contractor

**ngq**  
ISO 9001  
Registered  
Quality  
Management

DO NOT SCALE FROM THIS DRAWING.  
All measurements are to be taken unless otherwise stated.

- Traffic Management Notes:**
- All temporary traffic management shall be in accordance with Chapter 8 of the Traffic Signs Manual 2016, Traffic Signs Regulations and General Directions 2013 and the Safety at Street Works and Road Works, A Code of Practice, 2013.
  - All temporary traffic management locations are indicative to help clarity and are subject to approval from the on site client.
  - All carriageway widths to be a minimum of 3.25m wide unless otherwise shown.
  - This drawing has been specifically prepared to meet the requirements of the named client and may contain design or innovative features which differ from conventional design standards.
  - Upon installation the TM Foreman is responsible for ensuring the design of the traffic management meets the on site requirements, Chapter 8 standards and any modifications as necessary.

Site location:	Middelburg Square South, Folkestone, Kent , CT20 1EU
What 3 Words:	picier.huddling tidal PHASE 5A
Traffic Management:	Road Closure & Diversion route
Authority:	Kent County Council
Scale:	Date 10/10/2025
DWG no:	PHASE 5A-4257 - Middelburg Sq West - New Drainage - Road & Footway
Rev:	Description: ZW

**KEY**


- Traffic sign
- Traffic cone
- Diversion route
- Clearance area
- Protection Barrier
- Temporary yellow island
- Keib hopper
- Reside barrier

**Jackson**

**MIDDELBURG SQUARE WEST**

**PHASE 5A – NEW DRAINAGE & ROAD & FOOTWAY**

**NOTE:**  
Bouverie Road West, Westbound and Cheriton Place (Unavoidably) closed with traffic diverted via Castle Hill Road and Cheriton Gardens. Pedestrians using both existing and new footway/cycleways.

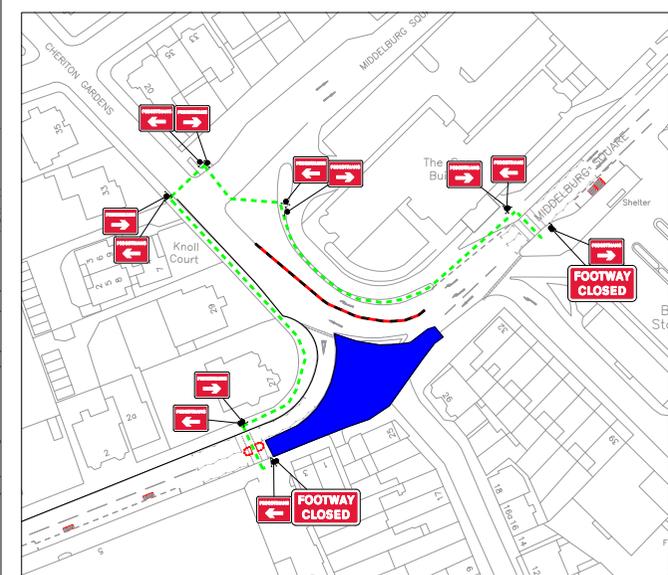

- Lane Closure**
- All traffic signs shall comply with Chapter 8 of the traffic Signs Manual
  - All traffic management equipment shall be provided by the Contractor, unless otherwise specified.
  - All signs shall be positioned so as not to be obscured by any other objects and shall not obstruct any other sign, permanent or temporary as much as is reasonably practicable.
  - The minimum lateral clearance between any area in which work is being carried out and that part of the carriageway available to traffic shall be 0.5m for roads with a speed limit of 40 mph or less and 1.2m for motorways and roads with a speed limit of 50 mph or more.
  - All traffic signs shall meet the reflectorisation requirements of BS 873 : Part 6 : 1983, Table 1.
  - The permitted use of given types of closure shall be as specified.
  - Constraints on the use of given types of closure shall be as specified.
  - The lengths of tapers shown on the standard lane closure drawings are based on a basic lane width of 3.65m, rounded up to generally the nearest 5m. Where the actual lane width varies from this figure the following shall be used to calculate taper lengths:  
Single carriageway road (speed limit 30 mph or less) - Rate of Taper 1 in 13  
Single carriageway road (speed limit 40 mph) - Rate of Taper 1 in 20  
Single carriageway road (speed limit 50 mph or more) - Rate of Taper 1 in 25  
Dual carriageway road without Hard Shoulder (speed limit 40 mph or less) - Rate of Taper 1 in 25  
Dual carriageway road without Hard Shoulder (speed limit 50 mph or more) - Rate of Taper 1 in 32  
Dual carriageway road with Hard Shoulder (any speed limit) - Rate of Taper 1 in 55  
Motorway (any speed limit) - Rate of Taper 1 in 55.
  - Works Access/Egress to be positioned to suit ongoing works.